






FÖHSE™

FUTURE OF HORTICULTURAL SCIENCE + ENGINEERING

+1 (888) FOHSE-77

HelpDesk@Fohse.com

www.Fohse.com

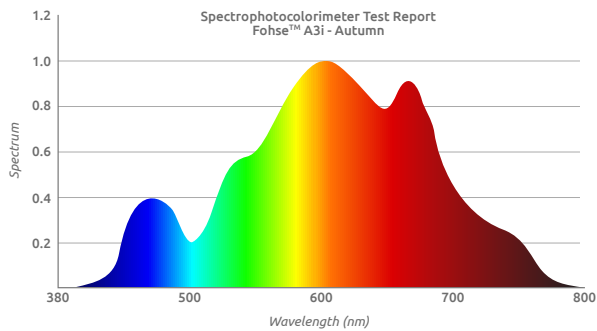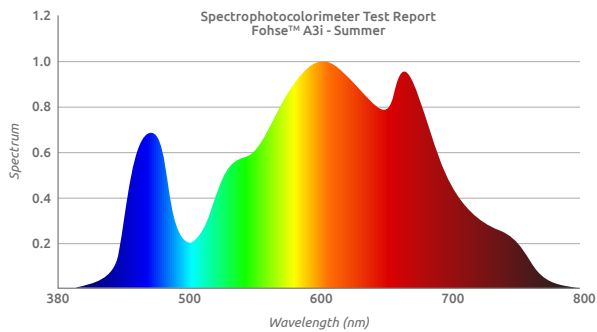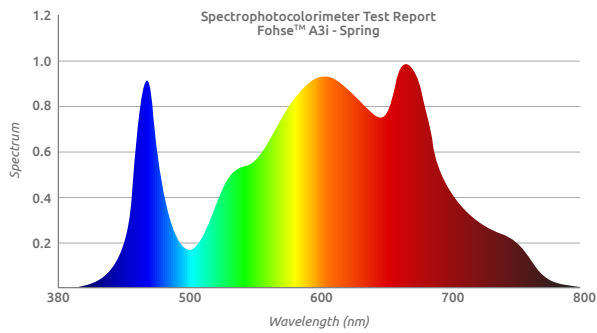

SPECIFICATIONS

Light source	432 LEDs
PPF	2,950 $\mu\text{Mol/s}$
LED Efficacy	up to 2.48 $\mu\text{Mol/s/W}$
Input power	1500W
Input voltage	90 - 305 VAC (120 - 227 VAC optimal)
Fixture dimensions	42.28L x 42.5W x 4H in
Weight	52 lbs
Mounting height	12 - 30 inches from canopy
Thermal management	Passive
Dimming	10%
Lens angle	90°
CRI	92
Control interface	Wall-mounted OLED panel
L90	50,000 hours
Power supply rating	100,000 hours
AC cord	15 feet
AC plug	L6-20 250VAC, twist lock
AC plug adaptor	110VAC
Mounting	Universal Hanging

PATENTS PENDING

© Copyright 2017 Fohse, Inc. | Designed and Tested in Minneapolis, MN
Specifications subject to change without notice. Tolerance \pm 5%



FUTURE OF HORTICULTURAL SCIENCE + ENGINEERING

+1 (888) FOHSE-77
HelpDesk@Fohse.com
www.Fohse.com

